

- *Knob setting on dual °C and °F scale*
- *Models for Pt100 and J thermocouples*
- *Selectable proportional or on/off control action*
- *115/230 Vac versions with relay output*

LB SERIES

The analogue controllers of the **LB** series have been specifically designed to guarantee simple and immediate use, with optimal performances in all temperature control applications.

The setting of the operating point is obtained by means of a knob on the scale graduated from 0 to 100, 200, 250, 300, 500 °C, according to the model with indications of the values also in °F. Different versions are available with input for Pt100 resistance temperature detectors and for J type Iron-Constantan thermocouples.

The control action can be set as proportional or on/off by a jumper on the connection; the output is with a changeover relay and the power supply is 115/230 Vac.

The dimensions, in the standard 48x48 mm format, are extremely compact and the mounting can be on panel using the fixing bracket supplied, or inside cabinet on a DIN rail socket.



TECHNICAL DATA


Power supply:	115/230 Vac $\pm 15\%$, preconfigured to the higher value with internal connection
Consumption:	5 VA max.
Sensor input:	J type Iron-Constantan thermocouples, or Pt100 Ω /0°C RTDs, sensor breaking protection with output deactivation
Measurement scale:	refer to table 1
Precision:	thermocouple measurement $\pm 1.2\%$ f.s. RTD measurement $\pm 1\%$ f.s. temperature drift 0.1% f.s. / °C of ambient temperature setting ± 2.5 f.s.
Control action:	maximum action, proportional or on/off configuration
Proportional band:	5% f.s.
Cycle time:	18 sec.
On/off hysteresis:	1% f.s.
Output type:	relay SPDT 250 Vac, 5 A
Setting:	knob on graduated °C/°F scale
Indicators:	red active OUTPUT LED
Connection:	octal socket
Electrical protection:	class 1
Mechanical protection:	IP54 - front panel and housing IP00 - contacts
Housing material:	ABS
Weight:	250 g max.
Operating temperature:	-10 ... +55°C
Storage temperature:	-20 ... +65°C
Reference standard:	EN 61010-1
Certifications:	CE

TABLES


<i>Model</i>	<i>°C scale</i>	<i>°F scale</i>
LB-x-x-10	0 ... 100	32 ... 212
LB-x-x-20	0 ... 200	32 ... 392
LB-x-x-25	0 ... 250	32 ... 482
LB-x-x-30	0 ... 300	32 ... 572
LB-x-x-50	0 ... 500	32 ... 932

Table 1: °C/°F SCALE

CONNECTIONS

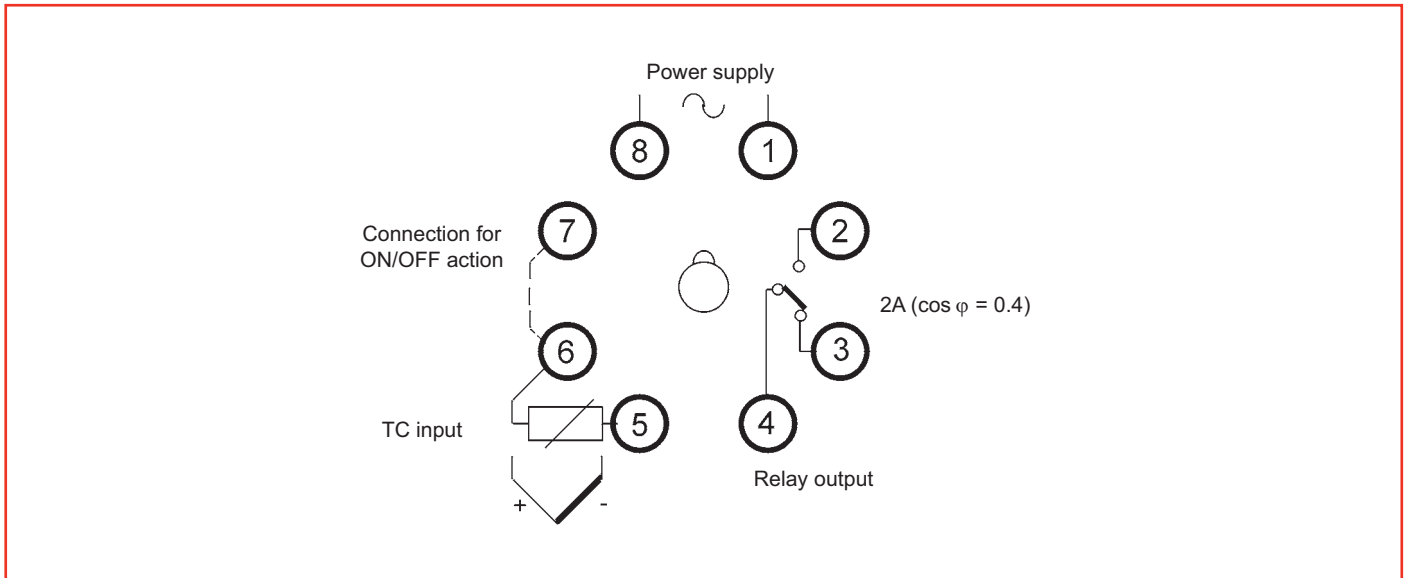

DIMENSIONS

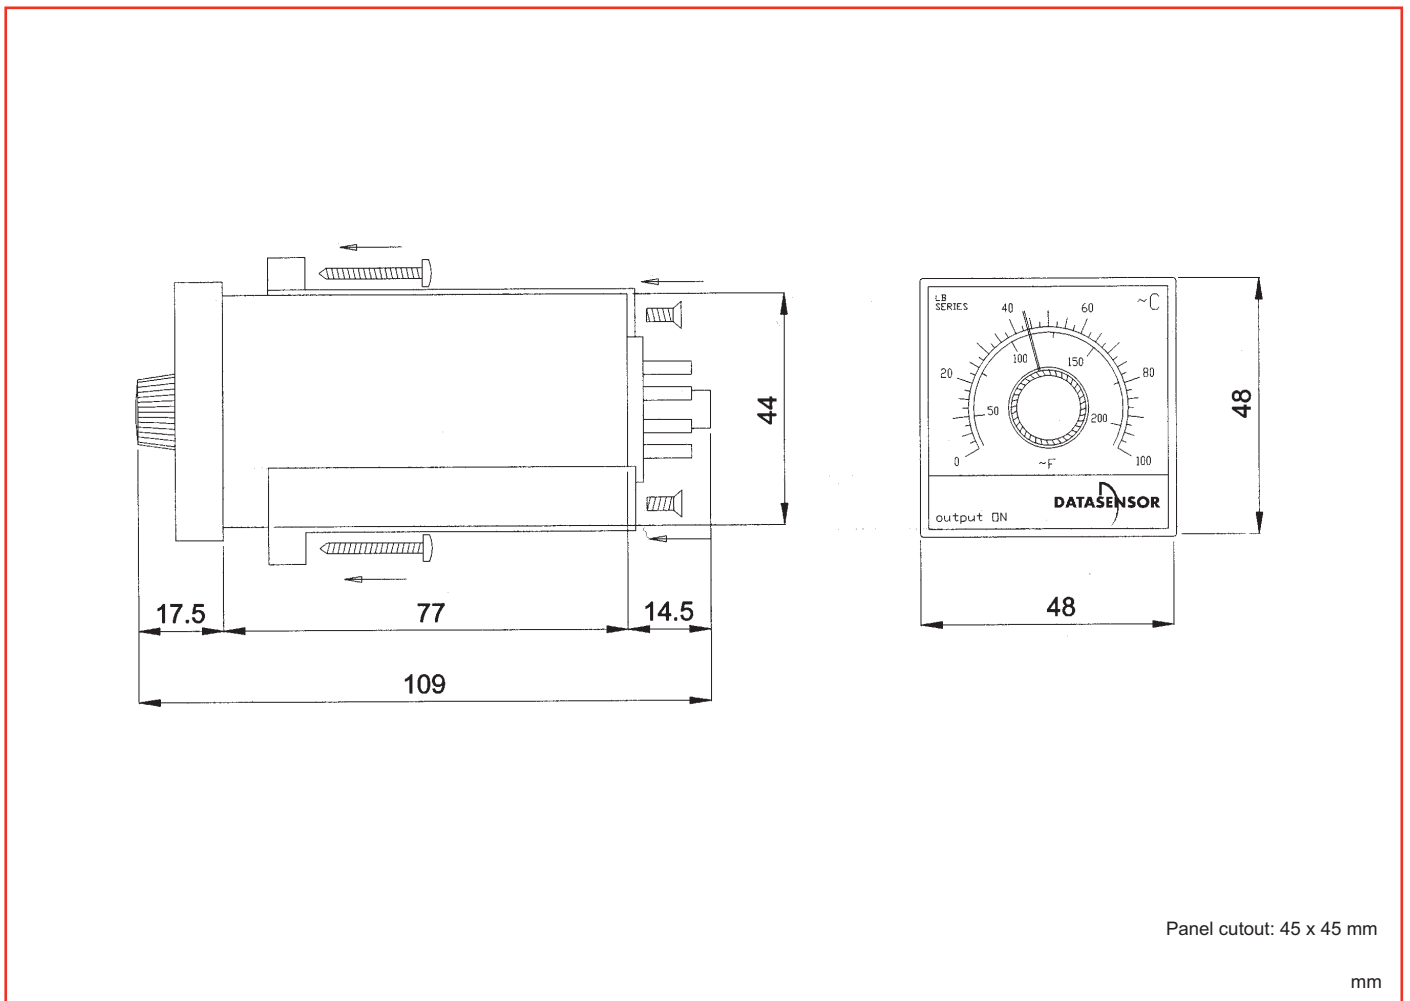



MODELS

MODEL	POWER SUPPLY	SCALE	INPUT	CODE N°
LB-10-10-TC	115/230 Vac	0 ... 100 °C	TC-J	972061100
LB-10-20-TC	115/230 Vac	0 ... 200 °C	TC-J	972061110
LB-10-25-TC	115/230 Vac	0 ... 250 °C	TC-J	972061120
LB-10-30-TC	115/230 Vac	0 ... 300 °C	TC-J	972061130
LB-10-50-TC	115/230 Vca	0 ... 500 °C	TC-J	972061140
LB-10-10-TR	115/230 Vac	0 ... 100 °C	Pt100	972061300
LB-10-20-TR	115/230 Vac	0 ... 200 °C	Pt100	972061310
LB-10-25-TR	115/230 Vac	0 ... 250 °C	Pt100	972061320
LB-10-30-TR	115/230 Vac	0 ... 300 °C	Pt100	972061330
LB-10-50-TR	115/230 Vac	0 ... 500 °C	Pt100	972061340

Distributed by:



Printed in Italy in July 2005
Rev. 02

TEMPERATURE CONTROLLERS