


BKS-S 75-TB4-05-PU-00,15/02/02
Ordering code: BCC0C54
Splitter box

M08x1, 2m, PUR
No
Normally open (NO)

BALLUFF
sensors worldwide

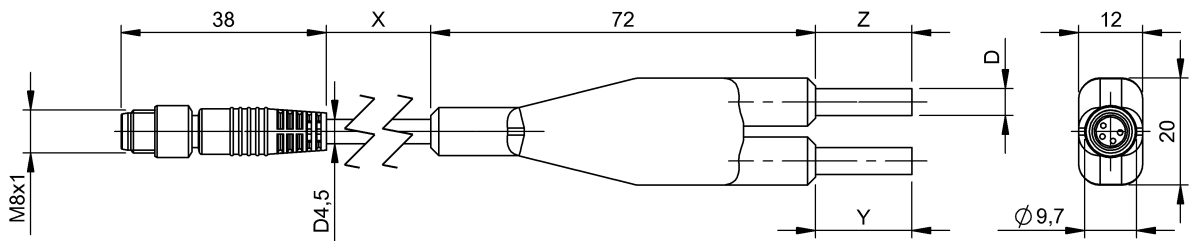

Characteristic data

Cable jacket colour black

Electrical data

Operating voltage UB max. AC 30 V
Operating voltage UB max. DC 30 V
Rated current (40 °C) 4.0 A

Mechanical data

Number of conductors 4
Cable length 2 m
Connector type M08x1
Conductor cross-section 0.34 mm²
Ambient temp. min. (fixed) -25 °C
Ambient temp. max. (fixed) 80 °C
Ambient temp. min. (moving) -25 °C
Ambient temp. max. (moving) 80 °C
Cable jacket material PUR
Bending radius fixed cable min. 5 x D

Bending radius repeated min. 10 x D
Contact material CuZn
Contact carrier material PUR
Cover nut material CuZn
Grip material PUR
Cable diameter D 4.8 +/- 0.20 mm
System molded
Number of sockets or pins 4
Connector style (Head I) Connector M8
Number of conductors (cable #2) 3 / 3


Basic data

Remarks

Enclosure type accord. to IEC 60529, when threaded together with the appropriate counterpart.
Cable length "X" = 0.15 m
Cable 1 marked with "1"

Definitions see main catalog

subject to change



BKS-S 75-TB4-05-PU-00,15/02/02

Ordering code: BCC0C54

Splitter box

M08x1, 2m, PUR

No

Normally open (NO)

BALLUFF

sensors worldwide

